

## Declaration of Conformity

### For plastic materials coming into contact with food

The manufacturer:

**Franz Mensch GmbH**  
Werner-von-Siemens-Str. 2  
D - 86807 Buchloe

herewith declares that the following delivered item

|                    |   |
|--------------------|---|
| <b>Item REF</b>    | <b>23246</b>                                  |
| <b>Description</b> | <b>Disposable aprons approx. 33 my   LDPE</b> |
| <b>Brand</b>       | <b>Hygonorm</b>                               |
| <b>Version</b>     | <b>Colour: blue</b>                           |
|                    | <b>Material thickness: ~33my</b>              |
|                    | <b>Length: 125cm</b>                          |
|                    | <b>Width: 75cm</b>                            |

complies with the legal requirements of the current valid version of the Regulation (EU) No. 10/2011, as well as of the Regulation (EU) No. 2023/2006 and of the Regulation (EC) No. 1935/2004. If used according to specifications, both the overall migration and the specific migration levels remain below the legal limit according to Regulation (EU) No. 10/2011. The substances and raw materials used are in compliance with Regulation (EU) No. 10/2011.

Proved that the products contain substances with limitations (SML/QM) as well as Dual-Use-Substances, the limits provided in Regulation (EU) No. 10/2011 are complied. For substances that are not mentioned in the union list (Annex I of Regulation (EU) No. 10/2011 including all amendments of the Regulation (EU) NO. 2019/37), national instructions shall apply, as e.g. the German BfR Recommendations on Food Contact Materials.

#### Overall Migration

| Food simulant              | Overall Migration | Migration Limit | Ratio              |
|----------------------------|-------------------|-----------------|--------------------|
| acetic acid 3%             | <2                | 10              | mg/dm <sup>2</sup> |
| ethanol 95%                | <2                | 10              | mg/dm <sup>2</sup> |
| isooctane (oil substitute) | 6                 | 10              | mg/dm <sup>2</sup> |

#### Specification for intended use or restrictions:

Ratio of the surfaces coming into contact with the food to the volume, on the basis of which the conformity of the material has been determined: **6dm<sup>2</sup>/kg**

Type/types of food that shall come into contact with the material: **greasy, acidic, watery, alcoholic**

Type/types of food that shall NOT come into contact with the material: **none**


Duration and temperature of handling and storage when in contact with the food:

| Simulanz                   | Duration    | Temperature |
|----------------------------|-------------|-------------|
| acetic acid 3%             | 2 hour(s)   | 70° C       |
| ethanol 95%                | 2 hour(s)   | 60° C       |
| isooctane (oil substitute) | 0.5 hour(s) | 40° C       |

The traceability of the product is ensured according to Regulation (EC) No. 1935/2004, article 17, by the information of date of production and LOT-number on the marking of the product.

Signed for and on behalf of Franz Mensch GmbH,

Buchloe, 09.08.2022

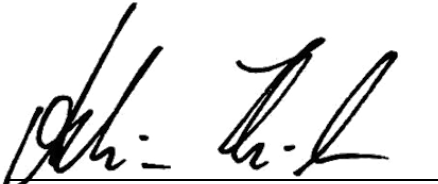

Achim Theiler  
Management